
ROV Latches

Designed to be used for to lift an ROV out of the water, without using the umbilical for lifting in air

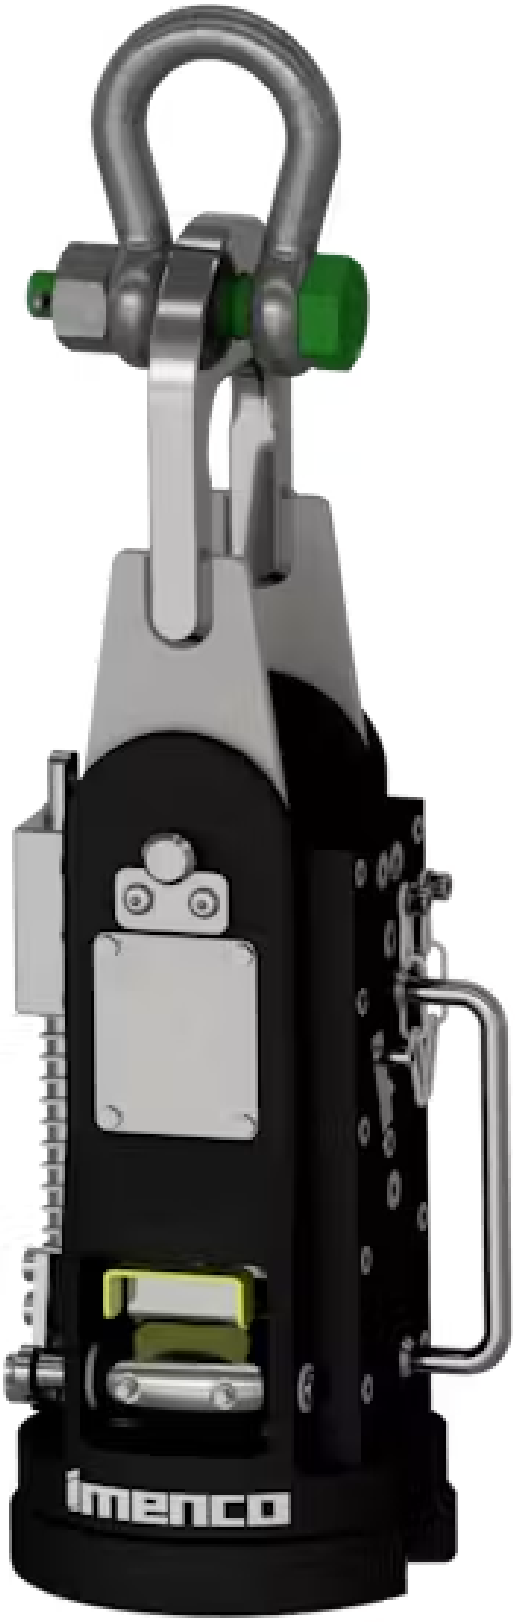

- Bullet, locking dogs and handle is made from high strength steel
- Main body made of seawater resistant Aluminium
- Door to allow for entering of umbilical into the latch
- Handle will fit a shackle of same capacity as the latch
- The standard bullet does not allow for load termination inside of the bullet
- Load termination of the umbilical must be done elsewhere
- Specially designed bullets for load terminating in the bullet may be designed.
- This is dependent of the umbilical design
- The bullet is attached to the main structure, thus taking the load off the umbilical
- Can be equipped with additional x/y joint and/or mounting rail

For further information, email
commercial@imenco.com

imenco
SMART SOLUTIONS