


ROV Tensioning Tool

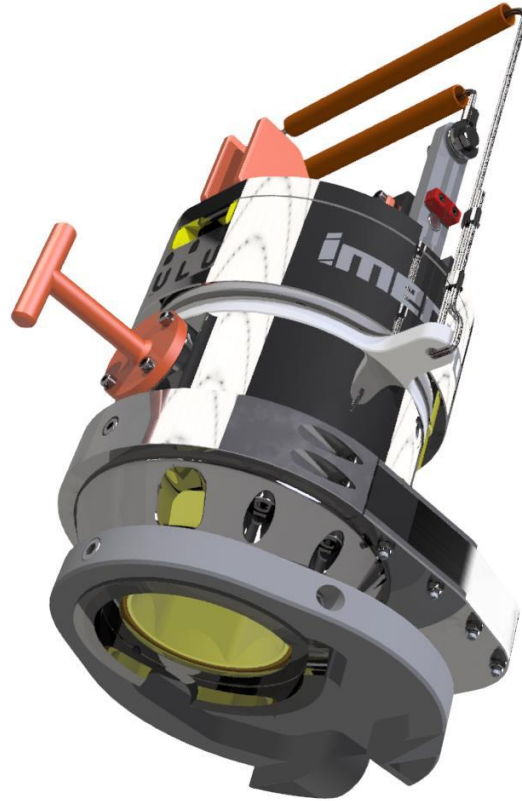

The ROV Tensioning Tool is easily operated by a T4

Bolt tensioning and nut spinning performed by one tool. It can be set to pre-tension bolts from 0-1500 kN/ M28-M60 (larger dimensions on request).

By use of the Imenco special design thread adapter, the risk of thread damage is eliminated. Including the RTT in project planning will increase operational efficiency and eliminate need for dive support.

For further information, email
commercial@imenco.com

imenco
SMART SOLUTIONS