Snapper™ Weak Link M2

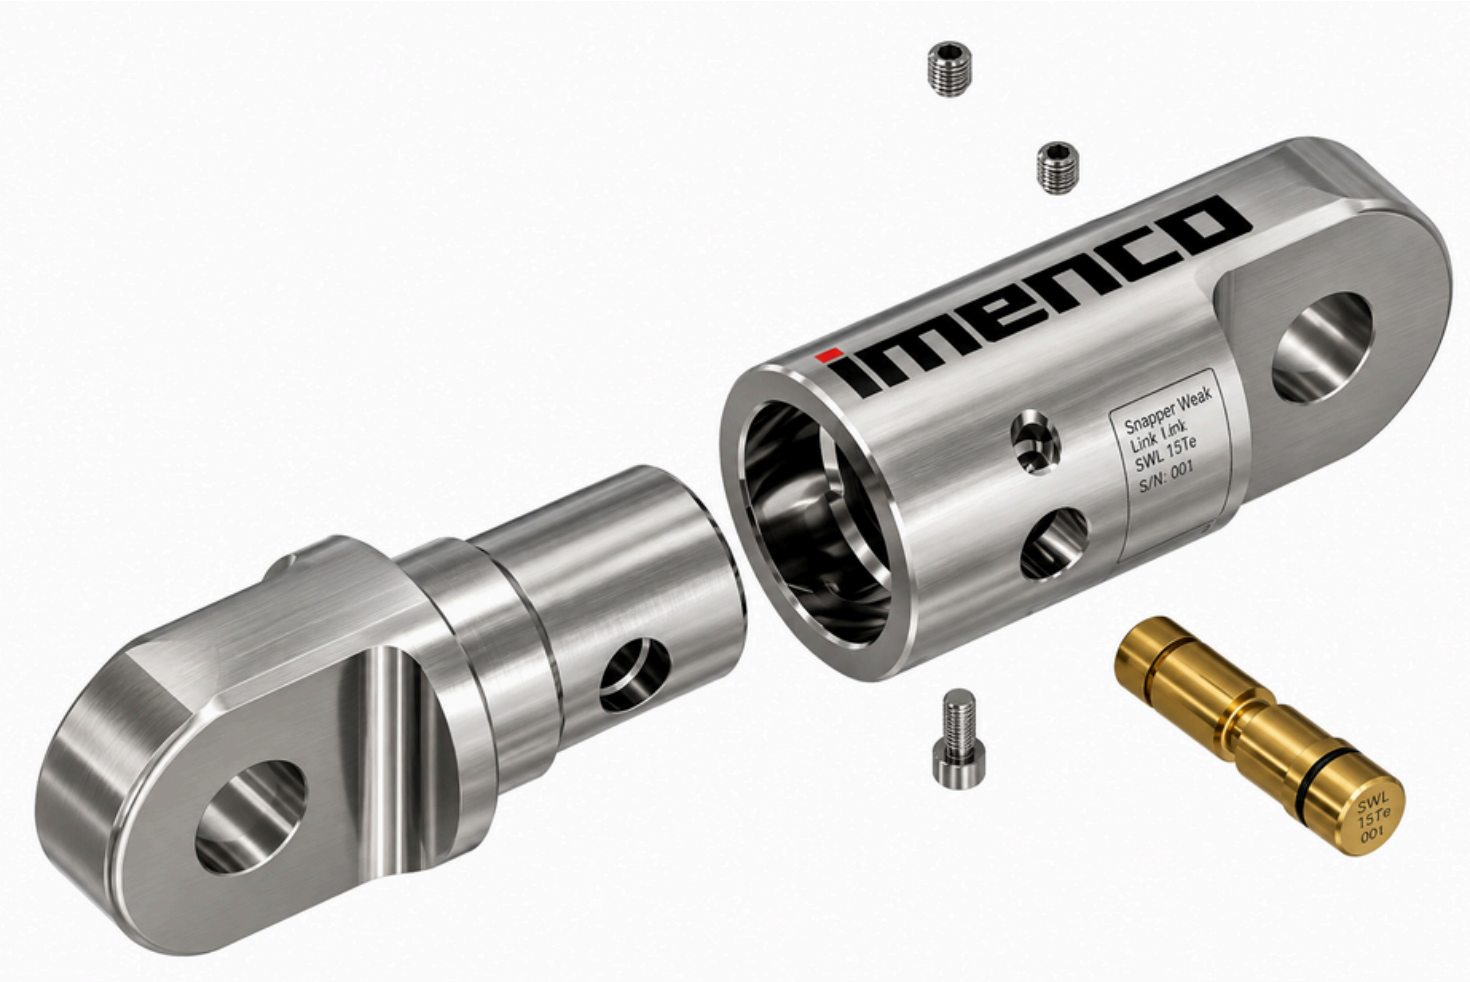

The perfect solution in ensuring a high safety standard for your lifting operations

Design

For all situations where a controlled emergency release point is required, the Imenco Snapper™ Weak Link range provides the perfect solution in ensuring a high safety standard for your lifting operations. The Snapper™ Weak Link is essentially a link introduced to a lifting chain, which is designed to ensure that an emergency release breaking point/value is included in the chain. This ensures that other components/elements in the chain are protected, i.e.: costly equipment, and/or where safety due to unforeseen breakage is a factor. This is achieved by use of a "shearpin" with a pre-determined shear value. With a suitable value Shearpin fitted, a Snapper™ Weak Link can also be used in standard lifting operations, where desired.

For further information, email
commercial@imenco.com

imenco
SMART SOLUTIONS

Snapper™ Weak Link M2

Design

- Designed according to DNV-ST-0378 (Standard for Offshore and platform lifting appliances, October 2021)
- NORSOK R-002 (Lifting Equipment, September 2012)
- Lifting Operations & Lifting Equipment Regulations 1998 (LOLER) – as applicable
- Machine Directive 2006/42/EC



The Snapper™ Weak Link range includes three standard sizes:

- Snapper™ 6,5 – fits standard 6,5 Te shackle
- Snapper™ 12 – fits standard 12 Te shackle
- Snapper™ 35 – fits standard 35 Te shackle

Shear Pin Range*					
Snapper 6,5 M2		**Snapper 12 M2**		**Snapper 35 M2**	
Test load: 13 Te		Test load: 24 Te		Test load: 43 Te	
Shear-pin 3-259		Shear-pin 3-666		Shear-pin 3-1526	
Shear pin Shear value	*Max. Lifting load**	*Shear pin Shear value*	*Max. Lifting load**	*Shear pin Shear value*	*Max. Lifting load**
1 Te	0,2 Te	4 Te	0,8 Te	15 Te	3 Te
2 Te	0,4 Te	4,55 Te	0,9 Te	20 Te	4 Te
3 Te	0,6 Te	8 Te	1,6 Te	25 Te	5 Te
4 Te	0,8 Te	10 Te	2 Te	30 Te	6 Te
4,6 Te	0,9 Te	12 Te	2,4 Te		
5,7 Te	1,1 Te				

For further information, email
commercial@imenco.com

imenco
SMART SOLUTIONS