

Imenco diving department is a continuation of Norwegian Universal Technology A/S, best known as NUT, which was the leading company in Norway providing equipment and service to the commercial diving industry worldwide.

imenco.com

## SMART HOT WATER MACHINE

Imenco AS produce a range of Divers Heaters a.k.a. Hot Water Machines which are high quality, extremely reliable in use, and offer a diverse complexity of control systems, tailored to suit customers' needs and specifications.

These electric divers heaters can be manufactured either with the very latest automated control systems (touch screens) or a more simplified, and cost effective manual version (push buttons)

The heaters are designed to a wide range power sources from 80 to 450 kW and can deliver up to 90 litre/min of hot sea water to the diver.

In addition, the units can also be delivered as a mobile system.

For integration into an existing DSV's - diving support vessels – Imenco can provide a complete turn-key operation, to include design, manufacture, testing, installation & commissioning of Divers Heater, Stand-By Volume Tanks for emergency use, Filtration System and high pressure hot sea water pipework and distribution system.

All of the Divers Heaters are DnV approved and capable of delivering 30 L/min per diver as specified in DNV RP-401 and NORSOK U-100.





For further information email diving@imenco.com




Contact us for additional information or to get a quotation. Send an email to diving@imenco.com or find personal contact info on our website.

# DIVING SYSTEMS & SERVICE

### imenco.com


#### **BENEFITS**

- Short warm up time
- Low and easy maintenance
- · Long lifetime
- High quality
- · Competitive price
- · Easy operation
- Good customer feedback

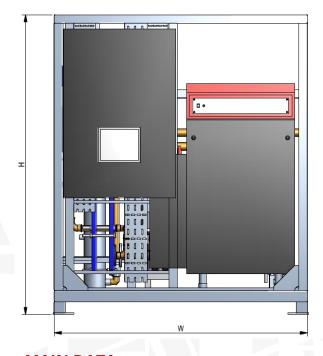

#### **DESIGN**

- · Complete stainless steel framework
- · Walk in frame design
- Primary/secondary loop
- Design temp. +2 to + 95°C
- Design ambient temp. -20 to + 50°C
- Tubing/piping: SS316L/CuNi
- DNV / IMCA / NORSOK compliant



#### **MAIN DATA**

Model	Power	Flow	Temp. control	L (mm)	W (mm)	H (mm)
HWM-S-450	375 - 600 kW	15 - 90 L/min	+/- 1°C	2250	1800	2130
HWM-A-60	35 - 150 kW	9 - 27 L/min	+/- 1°C	1000	1000	1000

For further information email diving@imenco.com



